

BRT-P3

Telescopic torque reaction arms with encoders

When useful?

- Arm position detection on X, Y and Z axis
- Tightening direction perpendicular to the reaction arm
- Horizontal installation
- Vertical installation




Features

- ✓ High strength carbon fiber
- ✓ High precision manufacturing
- ✓ Aluminum details
- ✓ High smoothness
- ✓ Ensure correct tightening sequences

Complements:

- + Tool holder
- + Balancer kit
- + Posix positioning system

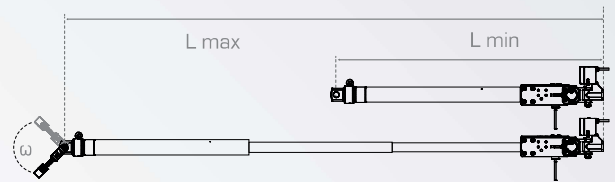

Arm	BNP p/n	Max torque		L min		L max		ω	Weight	
		Nm	f.lb	mm	in	mm	in		deg	Arm Kg (Lb)
BRT-P3 15 1000	020.0401.000	15	11,07	647	25,5	1227	48,3	60	3 (6,62)	*
BRT-P3 15 1500	020.0402.000	15	11,07	803	31,6	1713	67,4	60	3,1 (6,84)	*
BRT-P3 15 2000	020.0403.000	15	11,07	977	38,5	2227	87,7	60	3,2 (7,06)	*
BRT-P3 40 1000	020.0404.000	40	29,52	647	25,5	1227	48,3	50	3,2 (7,06)	*
BRT-P3 40 1500	020.0405.000	40	29,52	803	31,6	1713	67,4	50	3,3 (7,28)	*
BRT-P3 40 2000	020.0406.000	40	29,52	977	38,5	2227	87,7	50	3,4 (7,50)	*
BRT-P3 40 2500	020.0407.000	40	29,52	1157	45,6	2737	107,7	50	3,6 (7,94)	*
BRT-P3 80 1500	020.0408.000	80	59,04	830	32,7	1757	69,1	40	3,4 (7,50)	*
BRT-P3 80 2000	020.0409.000	80	59,04	1000	39,3	2249	88,5	40	3,5 (7,72)	*
BRT-P3 80 2500	020.0410.000	80	59,04	1169	46	2760	108,6	40	3,6 (7,94)	*
BRT-P3 150 1500	020.0411.000	150	110,7	839	33	1749	68,7	30	3,9 (8,60)	*
BRT-P3 150 2000	020.0412.000	150	110,7	1009	39,7	2087	82,2	30	4,1 (9,04)	*
BRT-P3 150 2500	020.0413.000	150	110,7	1174	46,2	2419	95,2	30	4,2 (9,26)	*
BRT-P3 220 1500	020.0414.000	220	162,36	839	33	1749	68,9	20	4,2 (9,26)	*
BRT-P3 220 2000	020.0415.000	220	162,36	1009	39,7	2259	88,9	20	4,3 (9,48)	*
BRT-P3 220 2500	020.0416.000	220	162,36	1174	46,2	2760	108,7	20	4,5 (9,92)	*

Notes *: it depends on installation

+  **Tool holder**
Pag. T14

+  **Balancer kit**
Pag. T17

+  **Posix**
Pag. SP3

! **Standard purchase order:** BRT-P3 + tool holder + Balancer kit + posix

