

BRT 10

Telescopic torque reaction arms

When useful?

- Tightening direction perpendicular to the reaction arm
- Horizontal installation
- Vertical installation




Features

- ✓ High strength carbon fiber
- ✓ High precision manufacturing
- ✓ Aluminum details
- ✓ High smoothness

Complements:

- + Tool holder (included)
- + Balancer

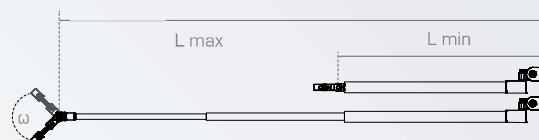

Arm	BNP p/n	Max torque		L min		L max		ω deg	Weight	
		Nm	f,lb	mm	in	mm	in		Arm Kg (Lb)	to balance Kg (Lb)
BRT10 1000	020.0001.000	10	7,38	495	19,49	1105	43,50	90	0,4 (.87)	*
BRT10 1500	020.0002.000	10	7,38	665	26,18	1605	63,19	90	0,45 (.99)	*

Notes *: it depends on installation

