




### When useful?

- Tightening direction perpendicular to the reaction arm
- Horizontal installation
- Vertical installation




### Features

- ✓ High strength carbon fiber
- ✓ High precision manufacturing
- ✓ Aluminum details
- ✓ High smoothness

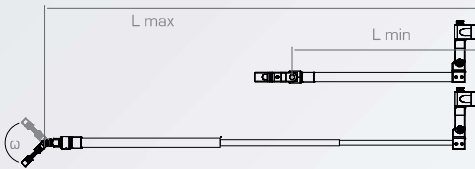

Arm	BNP p/n	Max torque		L min		L max		ω	Weight	
		Nm	f.lb	mm	in	mm	in		Arm Kg (Lb)	to balance Kg (Lb)
BRT15 1000	020.0003.000	15	11,06	486	19,13	1066	41,97	60	0,67 (1,47)	*
BRT15 1500	020.0004.000	15	11,06	646	25,43	1556	61,26	60	0,73 (1,60)	*
BRT15 2000	020.0005.000	15	11,06	806	31,73	2046	80,55	60	0,79 (1,73)	*
BRT40 1000	020.0006.000	40	29,50	486	19,13	1066	41,97	50	0,73 (1,62)	*
BRT40 1500	020.0007.000	40	29,50	646	25,43	1556	61,26	50	0,82 (1,81)	*
BRT40 2000	020.0008.000	40	29,50	806	31,73	2046	80,55	50	0,91 (2,01)	*
BRT40 2500	020.0009.000	40	29,50	986	38,82	2576	101,42	50	1 (2,20)	*
BRT80 1500	020.0010.000	80	59,00	658	25,91	1586	62,44	40	0,93 (2,05)	*
BRT80 2000	020.0011.000	80	59,00	828	32,60	2078	81,81	40	1,03 (2,27)	*
BRT80 2500	020.0012.000	80	59,00	998	39,29	2588	101,89	40	1,13 (2,49)	*
BRT150 1500	020.0013.000	150	110,63	668	26,30	1578	62,13	30	1,4 (3,08)	*
BRT150 2000	020.0014.000	150	110,63	838	32,99	1918	75,51	30	1,55 (3,41)	*
BRT150 2500	020.0015.000	150	110,63	1003	39,49	2248	88,50	30	1,72 (3,79)	*
BRT220 1500	020.0016.000	220	162,26	668	26,30	1578	62,13	20	1,59 (3,49)	*
BRT220 2000	020.0017.000	220	162,26	838	32,99	2088	82,20	20	1,78 (3,91)	*
BRT220 2500	020.0018.000	220	162,26	1003	39,49	2588	101,89	20	2 (4,40)	*

**Notes** \*: it depends on installation



**Standard purchase order:** BRT + tool holder + balancer