

High torque BRT

Telescopic torque reaction arms
300 - 500 Nm



When useful?

- Tightening direction perpendicular to the reaction arm
- Horizontal installation
- Vertical installation
- High torque power tools




Features

- ✓ High strength carbon fiber
- ✓ High precision manufacturing
- ✓ Aluminum details
- ✓ High smoothness

Complements:

- + Tool holder (custom)
- + Balancer
- + Encoders kit (custom)
- + Positioning system (custom)

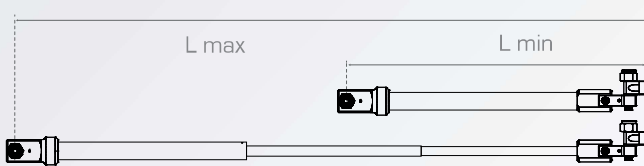

Arm	BNP p/n	Max torque		L min		L max		Weight	
		Nm	f.lb	mm	in	mm	in	Arm Kg (Lb)	To balance Kg (Lb)
BRT300 1500	020.0019.000	300	221,27	777	30,6	1662	65,43	2,77 (6,11)	*
BRT300 2000	020.0020.000	300	221,27	947	37,3	2172	85,51	3,01 (6,64)	*
BRT300 2500	020.0021.000	300	221,27	1112	43,8	2667	105,00	3,26 (7,19)	*
BRT500 1500	020.0022.000	500	368,78	870	34,3	1620	63,78	6,14 (13,54)	*
BRT500 2000	020.0023.000	500	368,78	1045	41,14	2160	85,04	6,75 (14,88)	*
BRT500 2500	020.0024.000	500	368,78	1275	50,2	2670	105,12	7,37 (16,25)	*

Notes*: it depends on installation

! Notes: BNP custom solutions can reach 2000 Nm max torque

+
Tool holder
Custom

+
Balancer
Pag. T18

+
Encoders kit
Custom

+
Positioning system
Custom

! Standard purchase order: High torque BRT+ tool holder + balancer